




WWW. MadBullAirsoft.com

MADBULL LFP Battery Charger+Balancer User Manual

NOTE: FOR MADBULL LFP BATTERY CELL ONLY

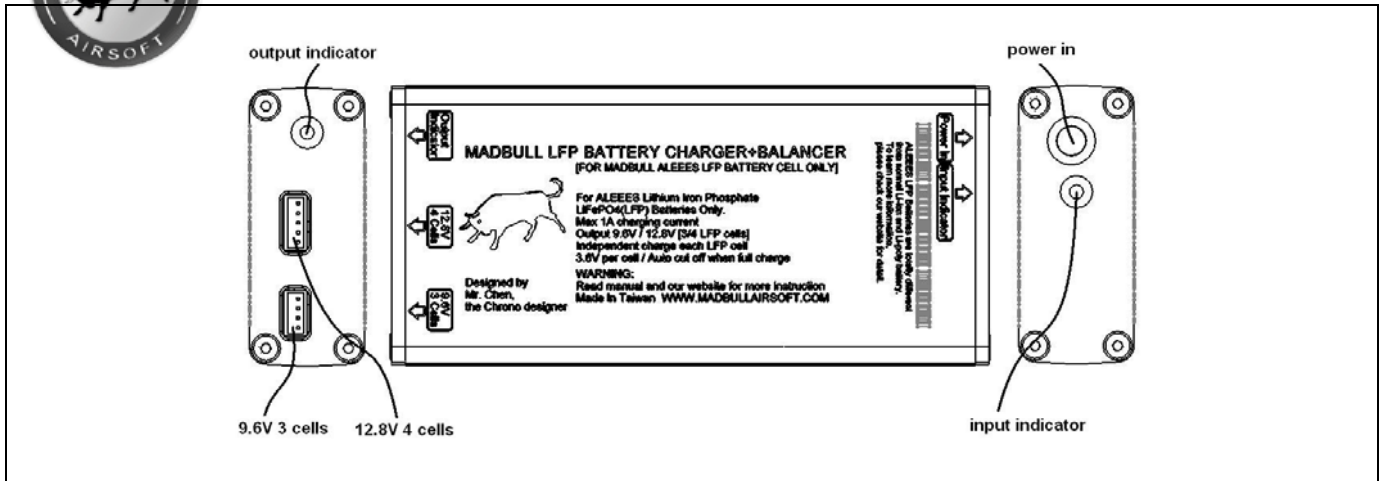

Packing List :

Charger X1

Adapter X1

Feature :

1. For Lithium Iron Phosphate LiFePO₄(LFP) Batteries Only.
2. Max 1A charging current.
3. Output 9.6V (3 LFP cells)/ 12.8V (4 LFP cells).
4. Independent charge each LFP cell.
5. 3.6V per cell / Auto cut off when full charge.
6. Handheld small size: 13*6*2.5cm
7. 6061T6 Aircraft aluminum. Extremely durable.

How to use MadBull Charger?

1. Plug in power adapter into power outlet.
2. Plug the other side of power adapter into "Power in" and the "input indicator" and "output indicator" will be turned on. (Standby mode)
3. Connect your LFP battery into the charger (if your LFP battery is 9.6v 3cells (12.8v 4 cells), plug into the "9.6V 3cells"("12.8v 4cells"))
4. When you plug the battery and power, the "output indicator" will be turn-off which means "**constant current**" mode. **You battery is charging now.**
10. When "output indicator" turns on that means "**constant voltage or saturate voltage**". **Your battery is ready to use.**

Important Notice :

1. Please check our website for Global Manufacturer direct warranty.
2. Keep away from water and humid environment. Never punch the Charger or let the Charger fall to the ground.
3. **Input indicator will be turn-off if battery is not completed charged..**
4. **Output indicator can detect full charging and turn on when battery has saturate volt. (charge completed.)**
5. Only charge one 9.6V (3 LFP cells) or 12.8V (4 LFP cells) battery. Do NOT charge 2 batteries at the same time.
6. **We are using CCCV charging technology: Charging "low voltage" battery by constant current (avoid overheat) and charging "saturate volt" battery at constant voltage.**
7. **When charging battery, please avoid any flammable items and put battery in the cool environment. Heat accumulation may cause fire.**
8. Adapter can only use at 100~240VAC.
9. Don't take off cover or you may destroy the internal component and void the warranty.

Product Advisory for ALL Airsoft related products

WARNING:

Don't change, obscure, alter, remove, or obliterate any coloration or markings on this gun. The coloration and/or marking on this product, including the blaze orange barrel tip are designed to comply with applicable state and federal law and regulations.

WARNING:

This product may be mistaken for a firearm by law enforcement officers or others. Any person who changes, alters, removes, or obliterate any coloration or markings that are required by state or federal law or regulation, in any way that makes this product look more like a firearm is guilty of a misdemeanor.

WARNING:


The open display, brandishing and/or exposing of this product in any "public place" may cause confusion and may be a crime. The term "public place" means any area opened to public, including but not limited to, streets, sidewalks, bridges, alleys, plazas, parks, driveways, front yards, parking lots, automobiles, whether moving or not, and buildings opened to the general public including those that serve food or during, or provide entertainment, and the doorways and entrances to buildings or dwellings.

WARNING:

Every person who, except in self-defense, draws or exhibits this product in a threatening manner against another in such a way as to cause a reasonable person apprehension or fear of bodily harm is guilty of a misdemeanor punishable by imprisonment in the county jail for a term of not less than 30 days.



WWW. MadBullAirsoft.com
MADBULL LFP Battery Charger+Balancer User Manual
NOTE: FOR MADBULL LFP BATTERY CELL ONLY

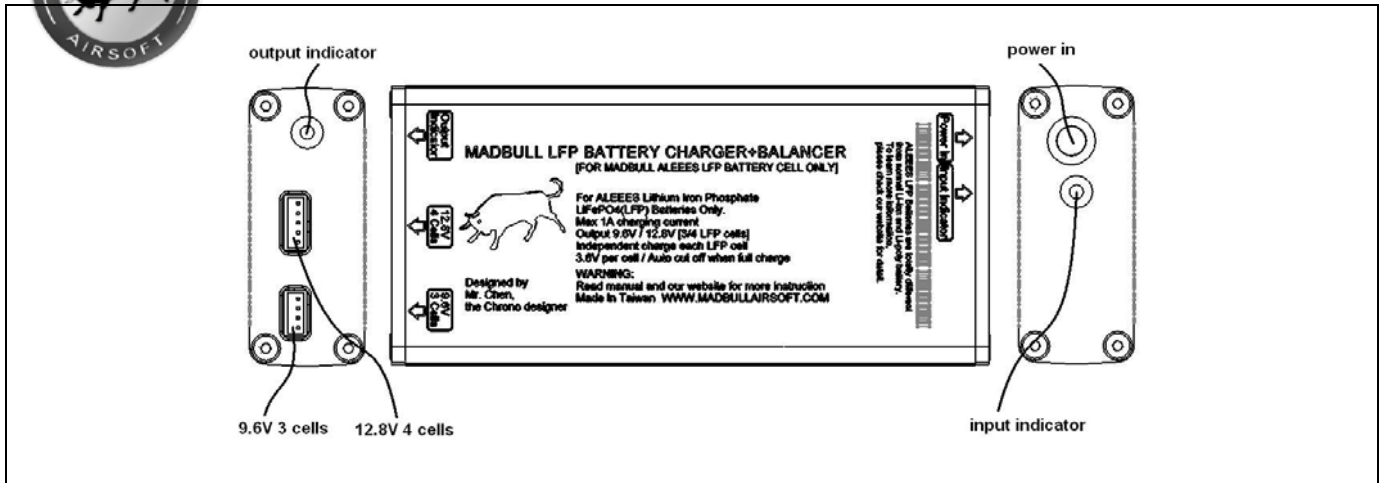

Packing List :

Charger X1
Adapter X1

Feature :

8. For Lithium Iron Phosphate LiFePO₄(LFP) Batteries Only.
9. Max 1A charging current.
10. Output 9.6V (3 LFP cells)/ 12.8V (4 LFP cells).
11. Independent charge each LFP cell.
12. 3.6V per cell / Auto cut off when full charge.
13. Handheld small size: 13*6*2.5cm
14. 6061T6 Aircraft aluminum. Extremely durable.

How to use MadBull Charger?

5. Plug in power adapter into power outlet.
6. Plug the other side of power adapter into "Power in" and the "input indicator" and "output indicator" will be turned on. (Standby mode)
7. Connect your LFP battery into the charger (if your LFP battery is 9.6v 3cells (12.8v 4 cells), plug into the "9.6V 3cells"("12.8v 4cells"))
8. When you plug the battery and power, the "output indicator" will be turn-off which means "**constant current**" mode. **You battery is charging now.**
20. When "output indicator" turns on that means "**constant voltage or saturate voltage**". **Your battery is ready to use.**

Important Notice :

11. Please check our website for Global Manufacturer direct warranty.
12. Keep away from water and humid environment. Never punch the Charger or let the Charger fall to the ground.
13. **Input indicator will be turn-off if battery is not completed charged..**
14. **Output indicator can detect full charging and turn on when battery has saturate volt. (charge completed.)**
15. Only charge one 9.6V (3 LFP cells) or 12.8V (4 LFP cells) battery. Do NOT charge 2 batteries at the same time.
16. **We are using CCCV charging technology: Charging "low voltage" battery by constant current (avoid overheat) and charging "saturate volt" battery at constant voltage.**
17. **When charging battery, please avoid any flammable items and put battery in the cool environment. Heat accumulation may cause fire.**
18. Adapter can only use at 100~240VAC.
19. Don't take off cover or you may destroy the internal component and void the warranty.

Product Advisory for ALL Airsoft related products

WARNING:

Don't change, obscure, alter, remove, or obliterate any coloration or markings on this gun. The coloration and/or marking on this product, including the blaze orange barrel tip are designed to comply with applicable state and federal law and regulations.

WARNING:

This product may be mistaken for a firearm by law enforcement officers or others. Any person who changes, alters, removes, or obliterate any coloration or markings that are required by state or federal law or regulation, in any way that makes this product look more like a firearm is guilty of a misdemeanor.

WARNING:

The open display, brandishing and/or exposing of this product in any "public place" may cause confusion and may be a crime. The term "public place" means any area opened to public, including but not limited to, streets, sidewalks, bridges, alleys, plazas, parks, driveways, front yards, parking lots, automobiles, whether moving or not, and buildings opened to the general public including those that serve food or during, or provide entertainment, and the doorways and entrances to buildings or dwellings.

WARNING:

Every person who, except in self-defense, draws or exhibits this product in a threatening manner against another in such a way as to cause a reasonable person apprehension or fear of bodily harm is guilty of a misdemeanor punishable by imprisonment in the county jail for a term of not less than 30 days.